


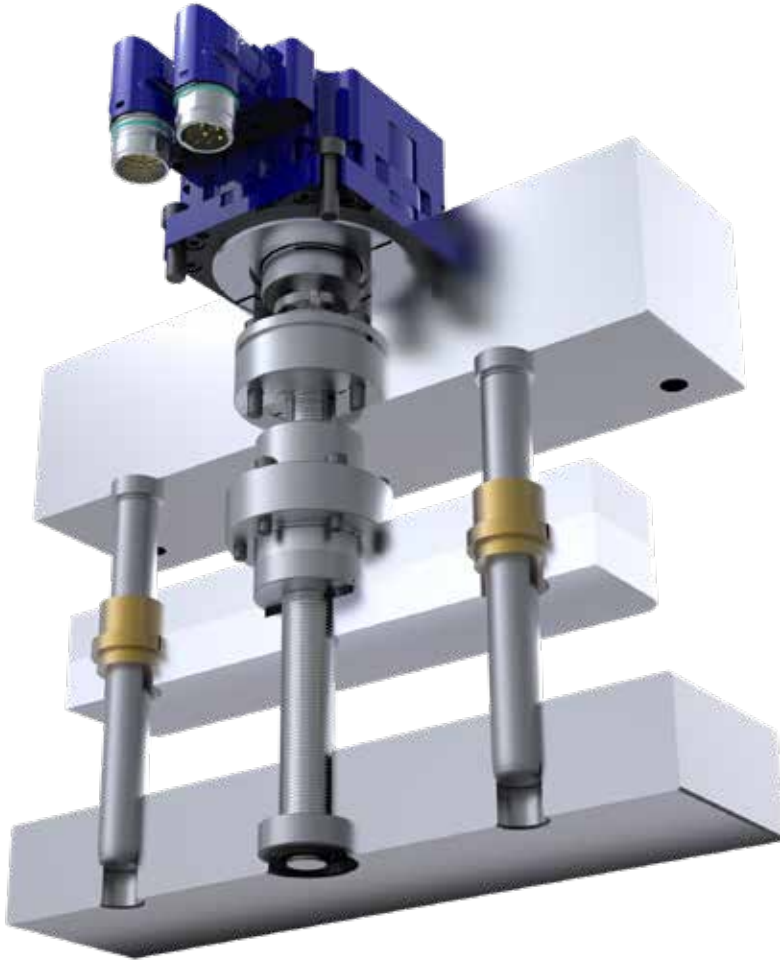

Motion
for
creation

servomold[®]

INTEGRATED LINEAR ACTION


PGT

THE POWER ALTERNATIVE TO HYDRAULIC CYLINDERS

Linear Actuator – fully integrated

Compact linear actuator with roller screw and space-saving Servomotor

- Spindle length from 250 mm to 3000 mm
- Position encoder system resolver or absolute encoder optional with motor brake
- Particularly low-noise and high travel speeds
- Large number of contact points allows compact design and long lifetime
- High load ratings, high efficiency and high positioning accuracy

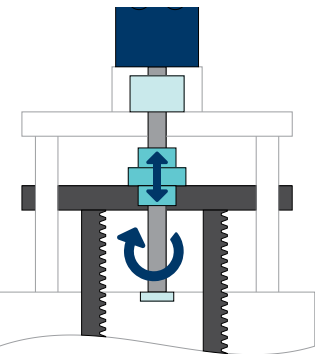

Rack movement



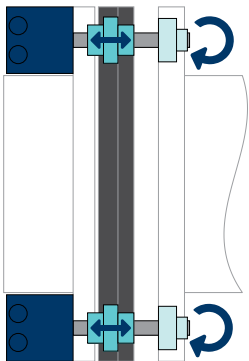


Plate movement

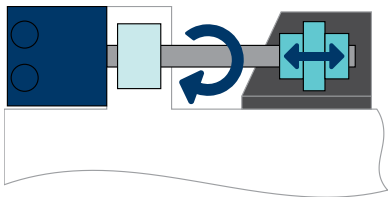

Slider movement

Planetary roller screw spindle

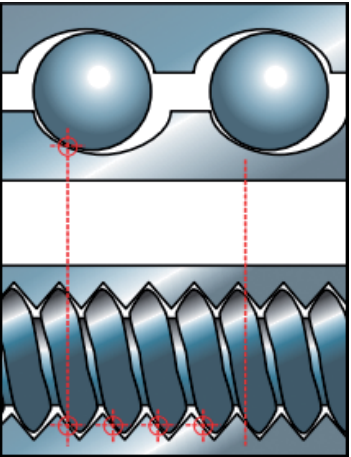


In comparison to ball screws the threaded roller spindle has a lot more contact points. Thus, considerably higher loads can be transmitted with greater rigidity. Advantages:

- Compact dimensions
- High forces and velocities
- Long lifetime (about 15x to KGS)



PGT Variants

Type	PGT 20x05			PGT 30x05	PGT 30x10	PGT 39x05	PGT 39x10
Servomotor ICM	09J	09N	09N	09N	14N	14N	14N
max. Force [kN]	5	8	11	16	20	24	30
max. Speed [mm/s]	300	300	300	300	500	250	450
Bearing Type*	LBE	LBE	FLE „20x52“	FLE „20x52“	FLE „30x72“	FLE „30x72“	FLE „30x72“
Dyn. load rating C [kN]	18	42	54	54	98	98	98
Size / Incl. Bearing [mm]	ca. 145x145x150	ca. 145x145x170	ca. 145x145x185	ca. 145x145x185	ca. 170x170x280	ca. 170x170x280	ca. 170x170x280
Nut length [mm]	65	65	65	85	85	100	100

* LBE = Bearing assembly “single” // LBD = Bearing assembly “double” // FLE = Flange bearing unit

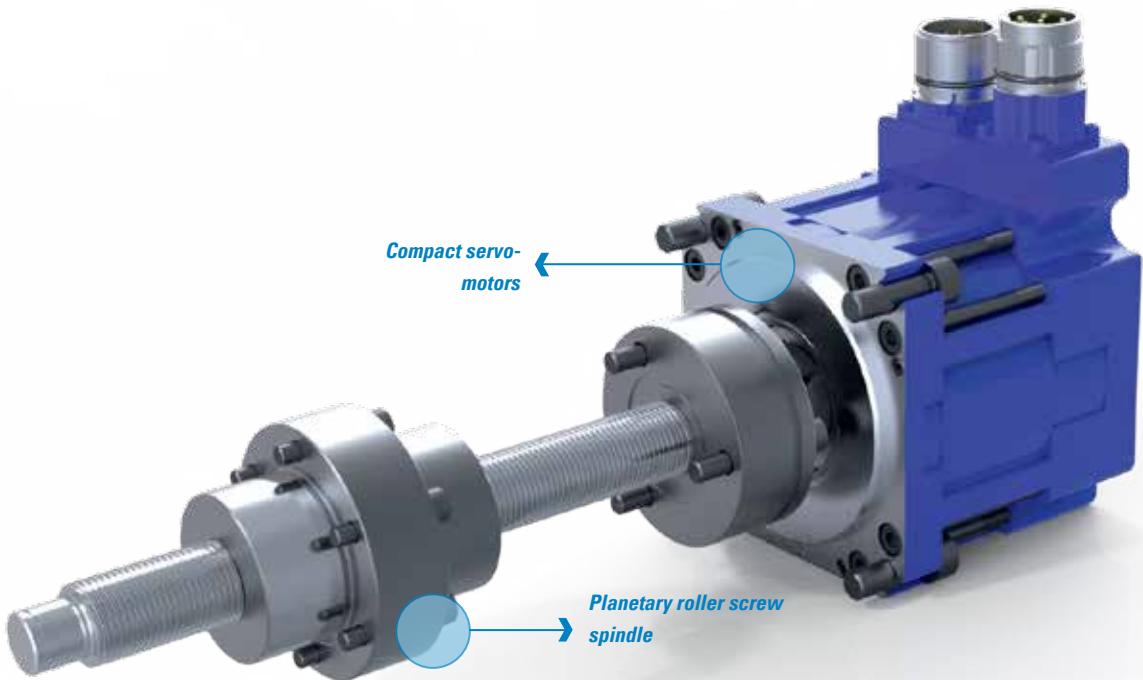


The bearing positions can be varied depending on the installation situation

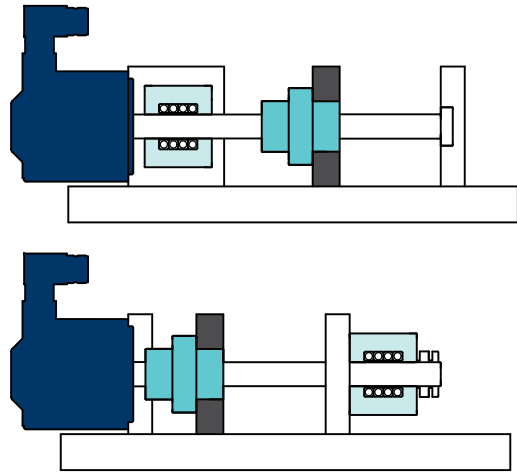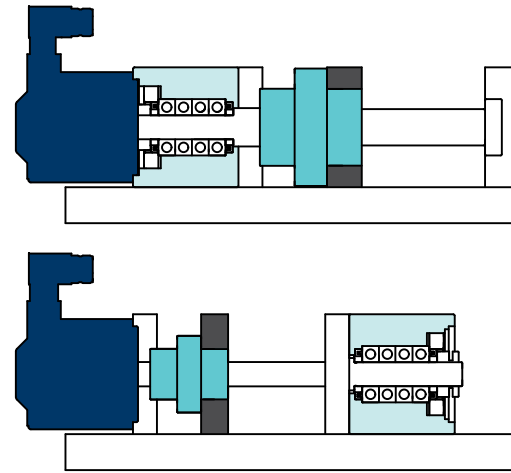**LBE****LBD****FLE***Bearing assembly "single / double"**Flange bearing unit*

Important

Depending on the application, a non-usable length of 40 mm must be considered as an addition to the spindle length.
Spindle length = nut length + 40 mm + stroke

References

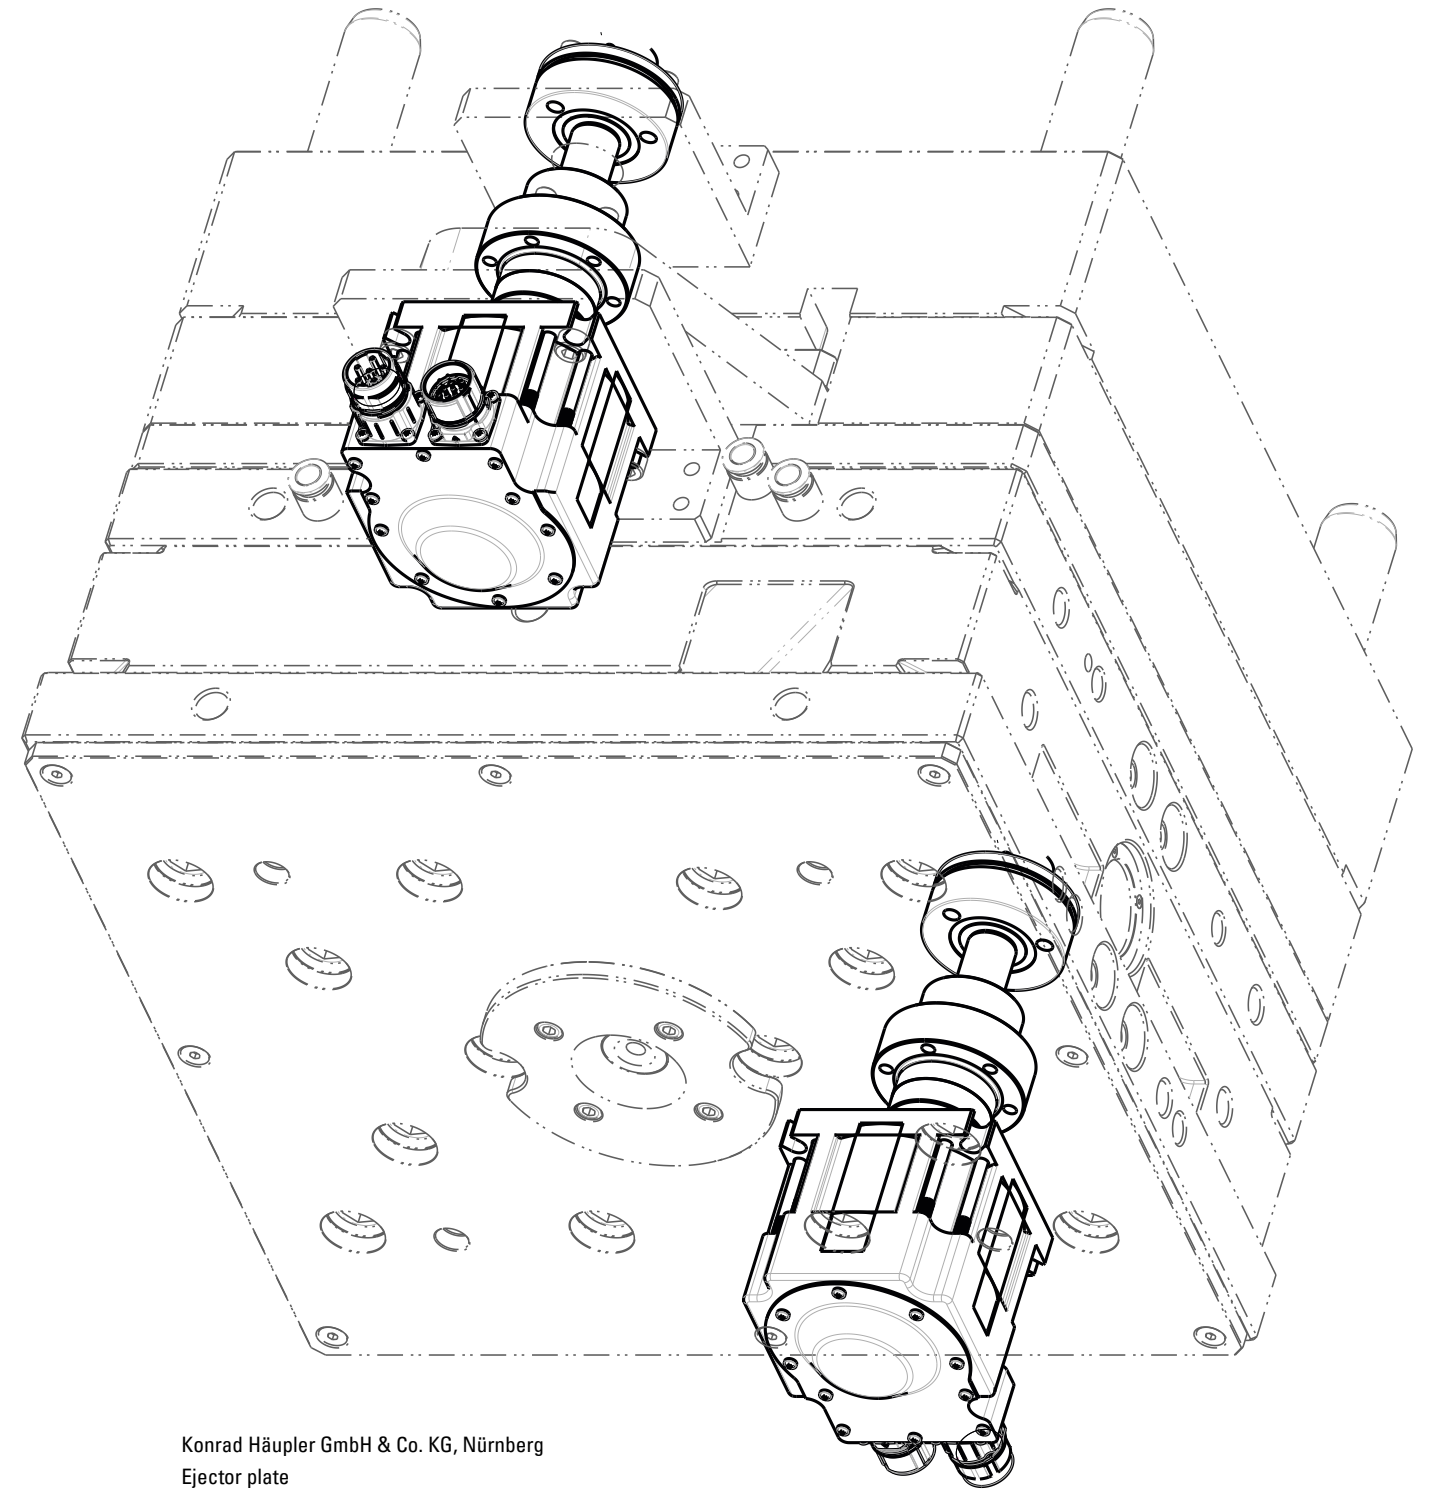

Konrad Häupler GmbH & Co. KG, Nürnberg
Ejector plate

With tens of thousands of products to choose from, DME is your one-stop shop for everything molding.

From complex undercuts solutions and plate control to standard pins, bushings and interlocks, the DME line of mold components will help you build or rebuild your mold base inside out, top to bottom. Industrial Supplies, Mold Bases, MUD Quick-Change, Control Systems, and Hot Runner solutions round out our extensive offering to truly be your one-stop shop.



World Headquarters

DME Company LLC

29111 Stephenson Highway
Madison Heights, MI 48071

800-626-6653 toll-free tel

248-398-6000 tel

www.DME.net web

DME@DME.net e-mail

DME of Canada Ltd.

5345 Outer Drive Unit 3
Windsor, Ontario
Canada N9G 0C4

800-387-6600 toll-free tel

905-677-6370 tel

DME_Canada@DME.net e-mail

DME Mexico / South America

Circuito el Marques Notre, No.55
Parque Industrial El Marqués
El Marqués, Querétaro, CP 76246

52.442.713.5666 tel

DME_MX@DME.net e-mail