



HOT RUNNER RFQ FORM

EcoONE
series

CUSTOMER DETAILS

Company: _____
 Customer ID: _____
 Contact Name: _____
 Email: _____
 Phone: _____

System Delivery Date: _____
 End User: _____
 Molder: _____
 Drawings Email: _____
 Sales Engineer: _____

APPLICATION TECHNICAL DETAILS

Part Name: _____
 Part Weight: _____
 Material: _____
 Grade: _____
 Industry: _____

No. of Cavities: _____
 No. of Drops: _____
 Gate Wall Thickness: _____
 Cold Runner Weight: _____
 Process/Mold Temp.: _____

Customer Supplied: 3D Files 2D Files Material Data Sheet

HOT RUNNER DETAILS

GATING DETAIL

Actuation: _____
 Style: _____
 Part Number: _____

NOZZLE DETAILS

Size: _____
 Length (A): _____
 Nozzle Body #: _____
 Heater #: _____

MANIFOLD DETAILS

Layout: _____
 XC: _____
 X: _____
 X1: _____
 X2: _____

Y: _____
 Y1: _____
 Y2: _____
 ØD: _____
 Inlet: _____

ELECTRICAL PLUGS & EBOX	POWER CABLE	TC CABLE

OPTIONS				

COMMENTS

Email your completed RFQ form to: EcoONEQuote@DME.net



APPENDIX: HOT HALF PLATES ORDER OPTIONS

MEASUREMENT	FRAME / PLATE SIZE		LEADER PINS			CUSTOMER SELECTION/ VALUE
	METRIC	DIN	DIAMETER (B)	LENGTH	PROTRUSION (C)	
X	350mm	346mm	25mm	"ST" + "L" + 10mm (min)	"L" + 10mm (min)	
Y	400mm	396mm				
X	400mm	396mm	30mm			
Y	500mm	496mm				
X	600mm	596mm	40mm			
Y	600mm	596mm				
X	600mm	596mm	40mm			
Y	800mm	796mm				
X	800mm	796mm	50mm			
Y	800mm	796mm				
ST	Manifold Plate Thickness (see hot half design guideline chart)					
L	Molding Elevation (L= A - PS + ΔL) NOTE: Molding elevation (L) is automatically determined by the standard manifold plate required to accommodate the size and length of your nozzle selection as noted above. Please design according to the hot half design guidelines. L= A - PS + ΔL					
NOZZLE SIZE	04	06	08	10	12	16
STACK-UP HEIGHT (Z)	121.4mm	129.4mm	131.4mm	133.4mm	151.4mm	151.4mm
D	Tie Bar Spacing - Horizontal					
E	Tie Bar Spacing - Vertical					
F	X Leader Pin Dimension					
G	Y Leader Pin Dimension					
H	X Assembly Screw Dimension					
I	Y Assembly Screw Dimension					
"A" Assembly Screw (A) Size & Orientation						
"A" Screw Thread Type & Size						
From Cavity Plate (Recommended)						
From Clamp Plate						
J	Clamp Slot Width					
K	Clamp Slot Depth					
M	Clamp Slot Distance from Platen					
N	Lift Hole Thread Type & Size					
W	Water Line Thread Type & Size					
Water Lines Recessed (Y/N)?						

Notes:


1. Clearly Indicate gate / drop location coordinates on the mold drawing (0.0000" / 0.000mm)
2. Clearly indicate hot runner leader pin location coordinates on mold drawing (0.0000" / 0.000mm)
3. Clearly indicate assembly screw coordinates on mold drawing (0.000" / 0.00mm)

APPENDIX: HOT HALF MEASUREMENTS




VIEWED FROM THE PARTING LINE
TOWARDS THE MACHINE NOZZLE

★
IMPORTANT NOTE!
"L" MOLDING ELEVATION IS
SET BY STANDARD MANIFOLD /
NOZZLE PLATE THICKNESS
AND SELECTED NOZZLE LENGTH

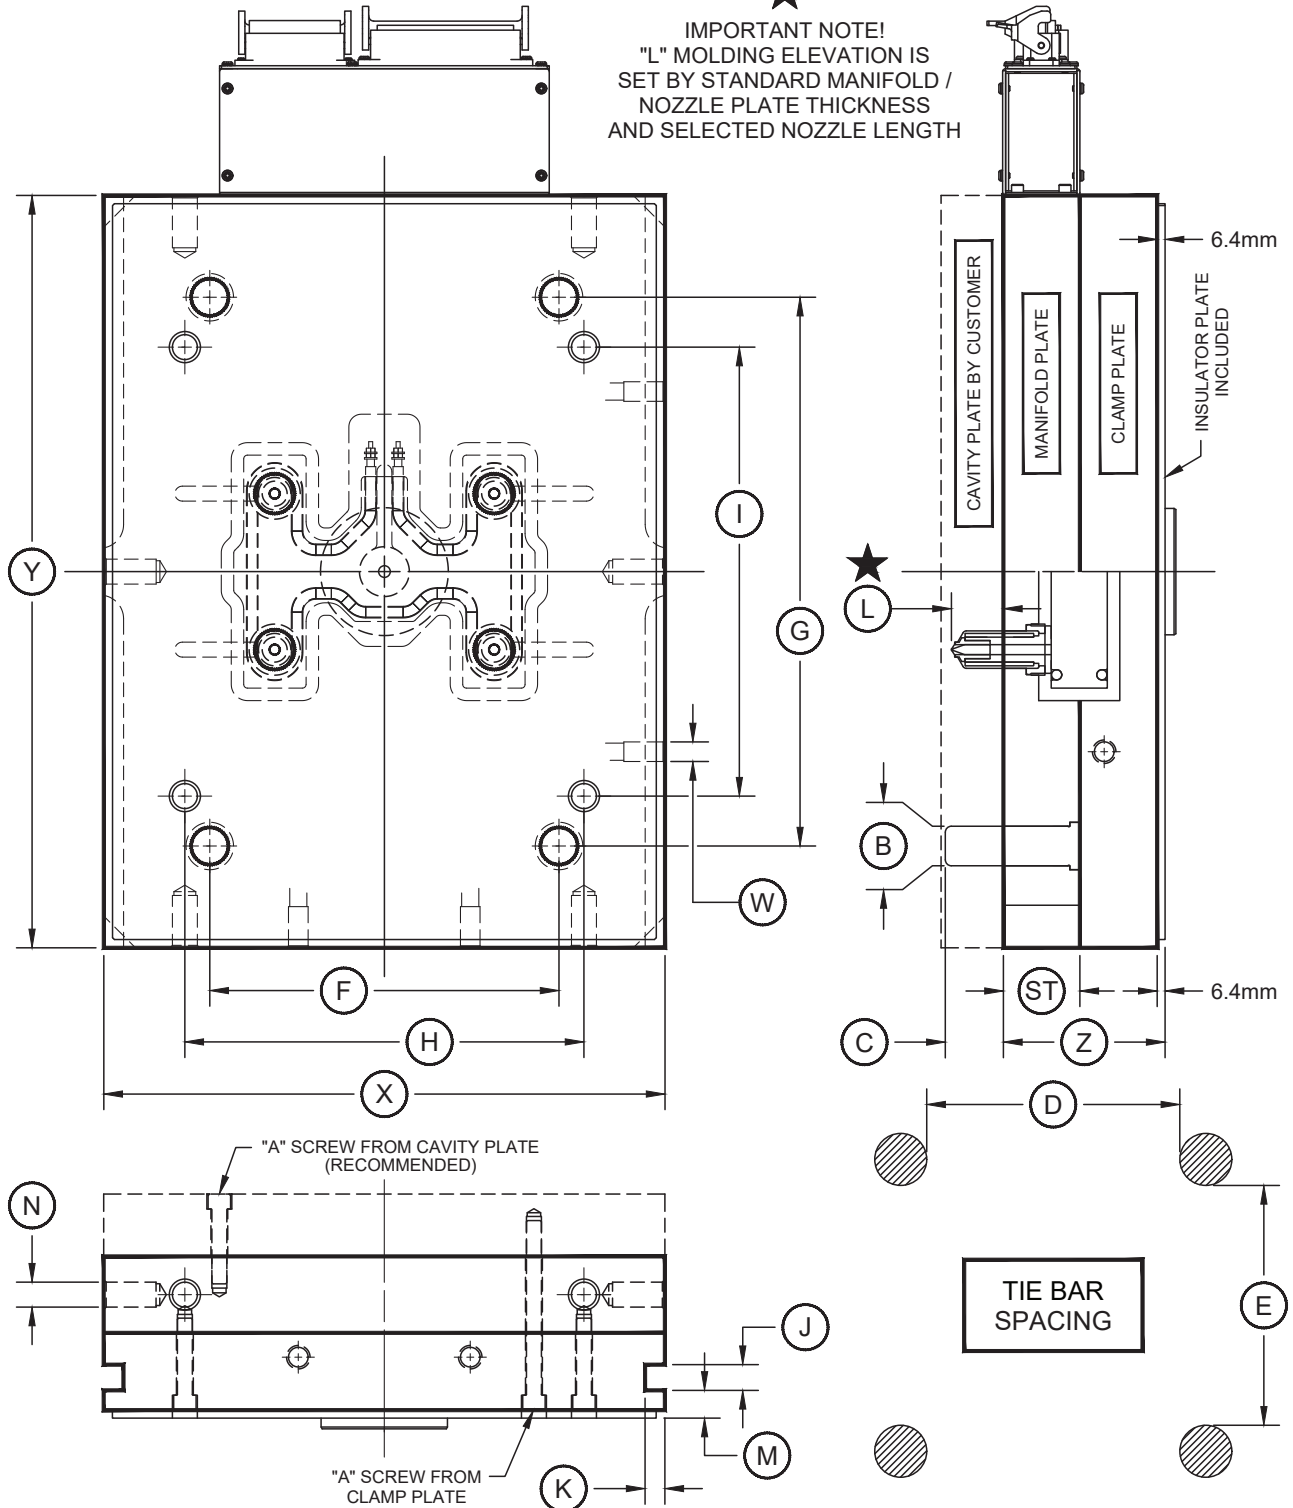

APPENDIX: HOT HALF DESIGN GUIDELINES

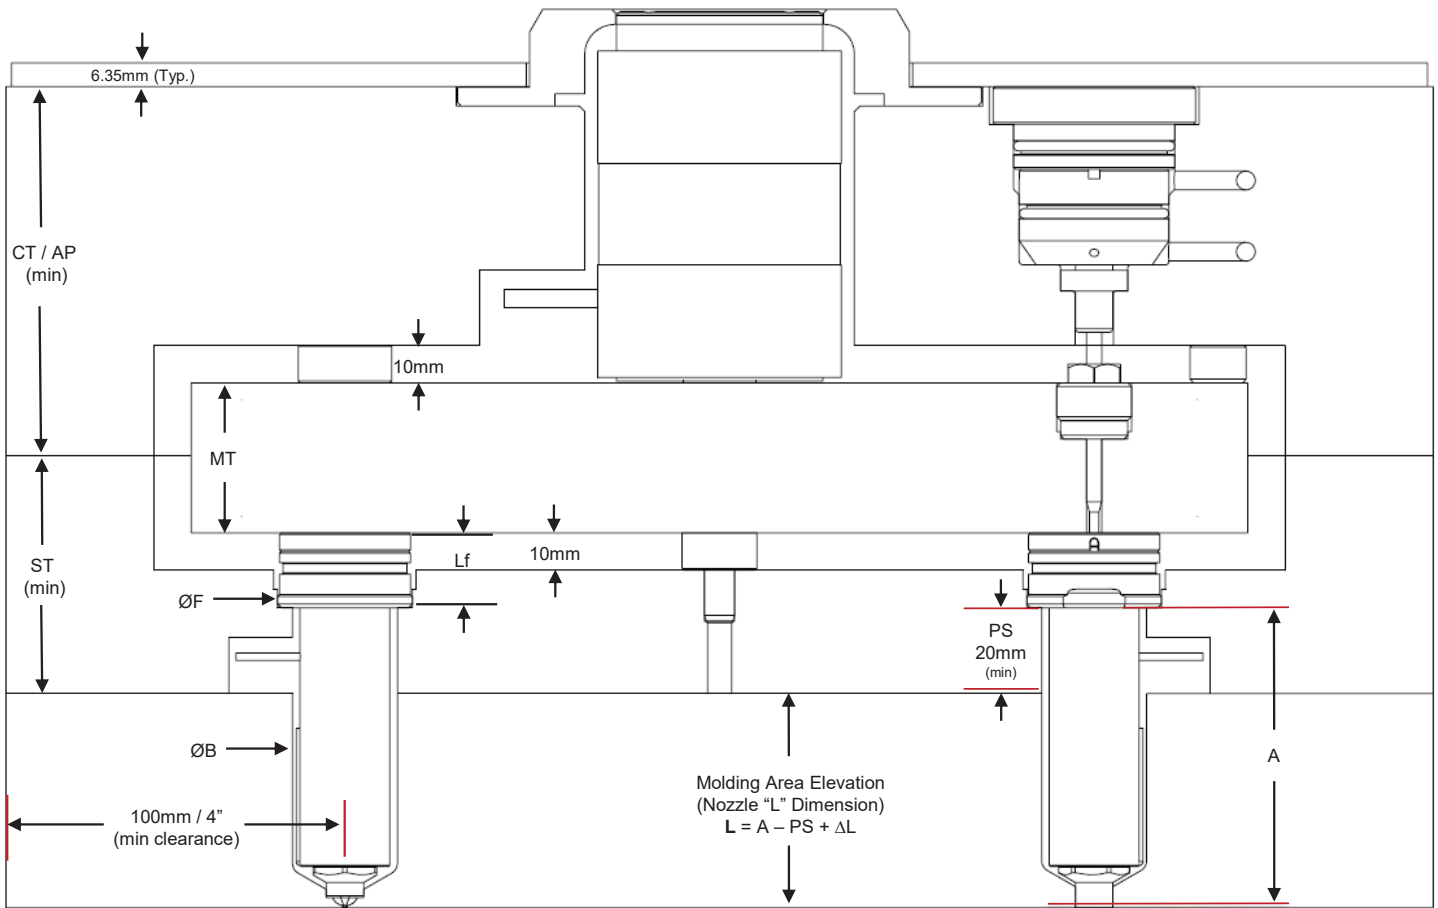

NOZZLE SIZE		04	06	08	10	12	16
Nozzle Length Range	A	50-140	60-160	60-180	50-160	50-200	70-300
Nozzle Flange Height	Lf	15	20	20	20	20	20
Nozzle Flange Ø	ØF	26	38	42	44	44	50
Nozzle Bore Cut-Out Ø	ØB	18	28	30	34	36	42
Plate Split (Min)	PS	20	20	20	20	20	20
Manifold Thickness (Typical)	MT	40	45	45	50	60	60
Manifold Plate Thickness (Min)	ST	55	63	63	65	70	70
Clamp Plate Thickness - NV (Min)	CT	60	60	62	62	75	75
Actuator Plate Thickness - V (Min)	AP	-	102	102	105	120	120